

K15

NEAR EDGE WAX RESIN FOR FLEXIBLE PACKAGING


K15 is a wax resin ribbon with excellent quality for printing on coated papers, synthetic paper and plastic films. Specially designed to print on TTO's at speed of more than 24 IPS depending on the substrates. Specially formulated to allow a longer roll length.

PHYSICAL CHARACTERISTICS

INK TYPE	WAX/ RESIN FOR NEAR EDGE PRINTHEAD
TOTAL THICKNESS	6.5 ± 0.1 µm
SUPPORT	Polyester film
BASE FILM THICKNESS	4.0 µm
COLOUR	Black
OPTICAL DENSITY	More than 1.35 (Macbeth)
MELTING POINT	65° C

PRINTING CHARACTERISTICS

MATERIAL TO PRINT	semi-glossy or high glossy paper, synthetic paper, PET, PP, Polyethylene
USAGE CONDITIONS	5°C to 35°C, 45% to 85% relative humidity
STORAGE CONDITIONS	-5°C to 45°C, 20% to 85% relative humidity

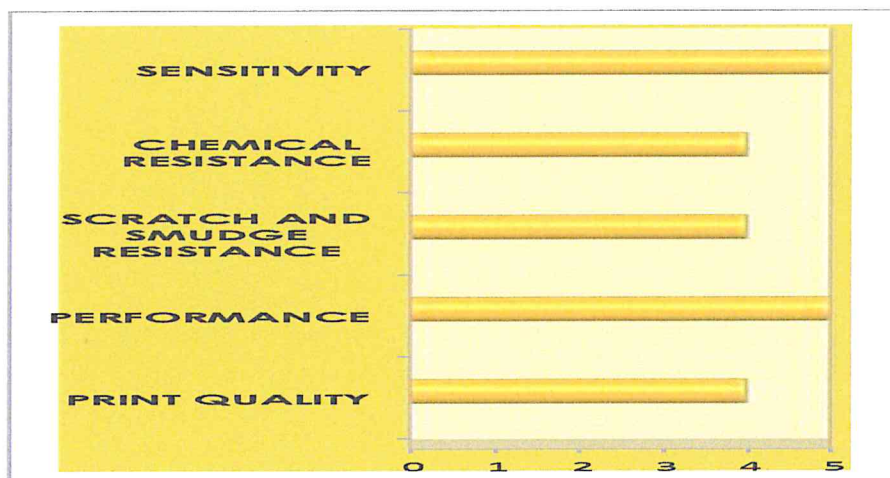

TTR *land*

APPLICATION EXAMPLES:



PACKAGING FILM



STORAGE LABELS



APPAREL TAG AND LABEL



LABORATORY LABELS



OUTDOOR LABELS



SHIPPING LABELS

